





Infinity Grayscale Video Series



The energy efficient Optec Infinity grayscale monochrome LED video display is the perfect balance between photographic/video quality imagery and affordable monochrome prices. Realistic graphics and high brightness deliver reliable, effective communications.

Available in configurations from storefront displays to large format video screens.


Standard Pixel Pitch Configurations



* Pixel layouts for illustration purposes only. Actual layouts may vary

Specifications

- Color Processing Capability.....256 shades (grayscale)
- Standard Colors.....Red / Amber
- Viewability.....140 degrees horizontal
- Graphic Capability.....Text, animation, pictures and video
- Control Software.....Media Editor Package
- Display Dimming.....100 levels
- Contrast Ratio.....1,000:1
- Frame Rate.....60 frames per second
- Voltage.....110 / 220 AC, 50 / 60Hz
- Diode Type.....Superbright
- Average LED Life.....100,000 hrs
- Service Access.....Front or rear
- Cabinet Construction.....Aluminum (Corrosion Resistant)
- Weatherproofing (Front/Rear)...IP65 / IP54
- Manufacturing Quality Standard...ISO 9001
- UL Listed.....ETL / UL48
- Product Warranty5 year parts & factory labor

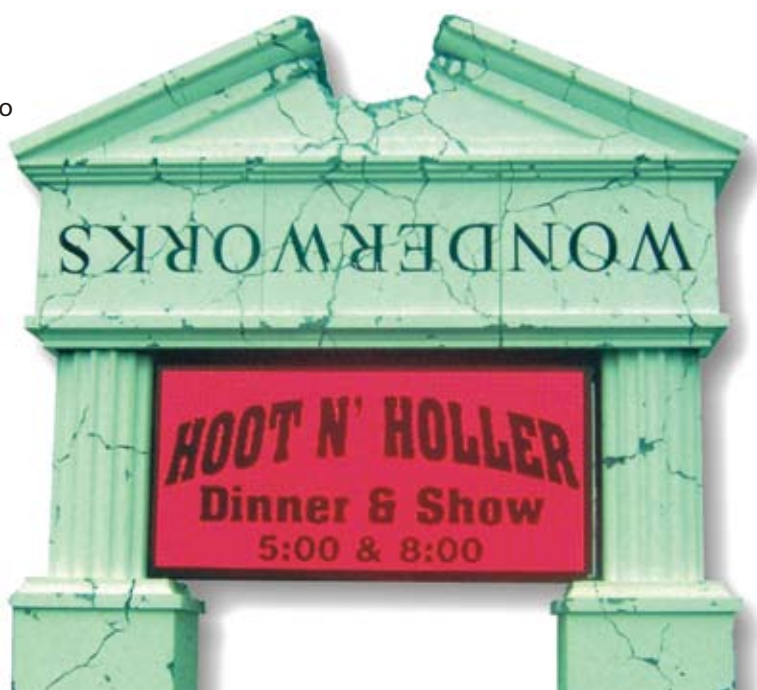

www.YourSignageSource.com
Sales@YourSignageSource.com

276-930-1509

Infinity Grayscale Video Series



Model INF-16-R/Y-G (16mm Pitch)

Physical Pitch	16mm
LEDs / Pixel	(2)
LED Density	7,813 LEDs/M ²
Calibrated Brightness	8,500 NITs
Module Matrix	8(h) x 16(w)
Max.Watts / Pixel	0.142w
Minimum Character Height	4.4"

Model INF-20-R/Y-G (20mm Pitch)

Physical Pitch	20mm
LEDs / Pixel	(2)
LED Density	5,000 LEDs/M ²
Calibrated Brightness	5,000 NITs
Module Matrix	8(h) x 8(w)
Watts / Pixel	0.142w
Minimum Character Height	5.5"

Model INF-22-R/Y-G (22mm Pitch)

Physical Pitch	22mm
LEDs / Pixel	(2)
LED Density	4,132 LEDs/M ²
Calibrated Brightness	5,000 NITs
Module Matrix	4(h) x 8(w)
Max.Watts / Pixel	0.142w
Minimum Character Height	6"

Model INF-34-R/Y-G (34mm Pitch)

Physical Pitch	34mm
LEDs / Pixel	4(R) / 6(A)
LED Density	3,460(R) / 5,190(A)
Calibrated Brightness	5,000 NITs Min.
Module Matrix	4(h) x 8(w)
Max.Watts / Pixel	.386w
Min Character Height	9.4"

* All product specifications subject to change without notice.



www.YourSignageSource.com
Sales@YourSignageSource.com

276-930-1509